

**Suitability:** Low - High level security:  
Industrial, Commercial, Utilities,  
Storage, Residential, Schools:

**KARSWAY**SERVICES

# Robusto - Cantilever

## Product description:

The KSL ROBUSTO cantilever provides the most simple solution for pedestrian/vehicle access control and security applications.

Genuine "Plug and Play" a powerful 230V/200W/74Nm torque drive motor with control, safety edges, photocell, warning light, wireless remote, key-switches ALL factory assembled into guide column AND with a UPS battery back-up makes this gate a leader in its class.

## Finish

- Galvanised
- Galvanised & Coated



## Characteristics:

Standard opening 3.00m to 9.00m with height 2.40m. Other openings / heights are available on request. A double leaf version is also available.

Selection of standard infill designs suitable for most applications, domestic to industrial, round or square tubular palings, arrow finials, rings, double wire weld mesh, palisade.

## Coating

- Powder coated in RAL 6005, 6009, 7016 and 9005
- Other colours on request

Karsway Services Ltd PO Box 221, Consett, Co Durham DH8 1ES


[www.karsway.co.uk](http://www.karsway.co.uk) [sales@karsway.co.uk](mailto:sales@karsway.co.uk)

Tel 08458 726663 Fax 08458 726662

**Suitability:** Low - High level security:  
**Industrial, Commercial, Utilities,  
 Storage, Residential, Schools:**

**KARSWAY SERVICES**

# Robusto - Cantilever

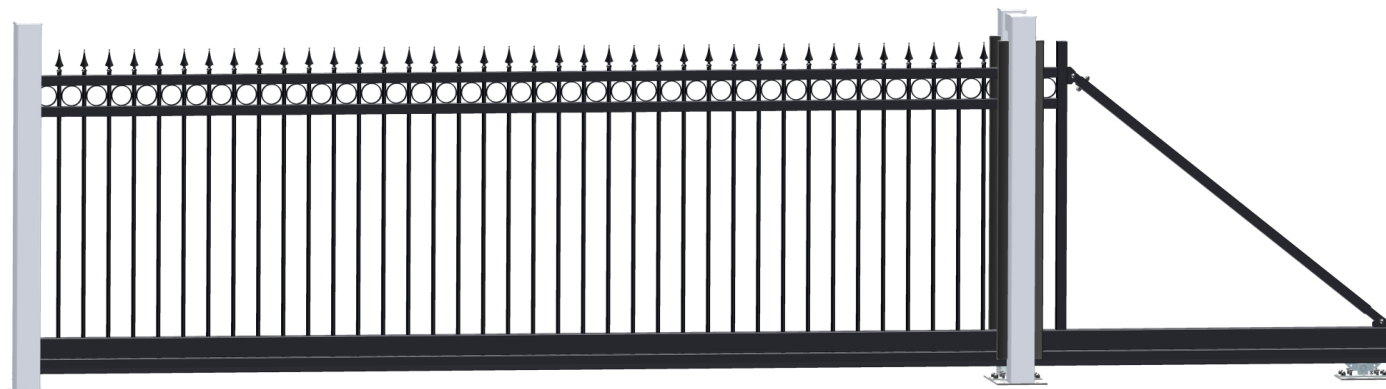

*Above* Manually operated gate with infill type CLA - Classic Line Arrow

Robusto gates are thoughtfully designed making them suitable for numerous applications.

With the correct choice of infill the gate is suitable for industrial, commercial and schools applications as well residential domestic installations anywhere when the need for robust security is upmost.

All structural components are hollow section steel, these are fully hot dip galvanised both internal as well as external with the option for additional colour coated finish to relevant standards. All nuts and bolts are supplied with plastic protective caps both for protection and appearance. A gate with an extended service life and minimal maintenance.

**Infill designs**



- BL  
BaseLine
- SL  
SmartLine
- SLD  
SmartLine  
Double
- CLD  
ClassicLine  
Double
- CLP  
ClassicLine  
Pro
- CLA  
ClassicLine  
Arrow
- HL  
HighLine
- DSM  
WeldMesh
- PAL  
Palisade



Guide posts 80 x 80mm hollow section steel  
 Top rail guide rollers enclosed to protect from jamming and entrapment



Gate wing rear edge with tension and height adjustment.  
 Note protective plastic caps.



Powerful 230V/500W 74Nm Motor with UPS Battery back up, ramped soft start and stop.  
 Built into strong steel full height cabinet with space for additional access control.  
 Factory fitted ASO Safety edges, photocells and wireless remote control as a norm.

Infill - Ø26mm tubular palings spaced at 150mm c/c on all infill types with the exception of HL-DSM-PAL  
 HL uses 25x25mm square tubular palings at 150mm c/c, DSM Ø8/6/8mm 200x50mm weldmesh  
 PAL - Steel Palisade D or W section @ 150mm centres.  
 Option BL SL SLD CLD HL - 120mm or 100mm centre to centre infill.  
 BL with optional serrated top edge - "Dragon Tail"

**Karsway Services Ltd PO Box 221, Consett, Co Durham DH8 1ES**

**www.karsway.co.uk sales@karsway.co.uk**

**Tel 08458 726663 Fax 08458 726662**