

## Swiss Cantilever sliding gate.

### Characteristics.

The Swiss cantilever sliding gate, designed and built to a strict criteria resulting in a high quality design, superior to other products combining technique and value, a gate that is fully factory assembled and tested.

A unique class leading product.

Available with a wide range of standard infill designs in both manual or "plug and play" automated versions.

### Infill

BaseLine - Ø26mm standard @ 150mm c/c \*options 100 or 125 centres and a dragon tail anti-climb top edge.

SmartLine - Ø26mm @ 150mm c/c with tops cut to a point.

HighLine - 25mmx25mm @ 150mm c/c

\*options 100 or 125 centres

ClassicLine Pro - Ø26mm @ 150mm c/c

DSM - Ø8/6/8mm, 200x50mm mesh

Weldmesh - 358

Palisade - Steel Palisade

Other infill on request.

### Construction

Rectangular and square hollow section steel gate frame and posts, section sizes to suit application.

### Opening

Widths (single):- 3.00m to 16.00m

Widths (double):- 6.00m to 32.00m

### Height

1.00m to 2.50m.


Other heights on request

### Treatment

(i) Galvanised up to 6.00m opening

(i) Additional powder coating in standard RAL colour:

(ii) Any RAL colour

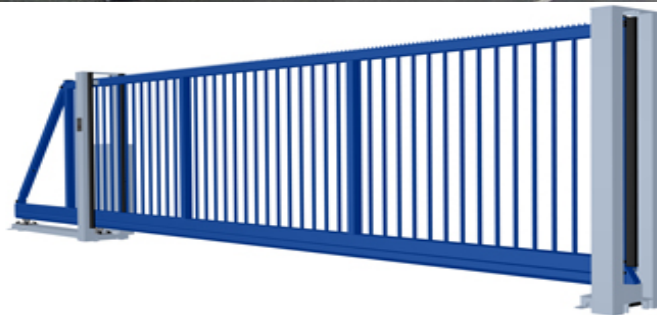

### Power Operation

400V-230V Motor, rack & pinion drive built into lockable steel drive unit (securely containing motor and control). Includes as standard key switches and wireless remote control. All gates automated are fitted with CE compliant safety features, contact strips, warning-light and photocell set as standard.

**KARSWAY SERVICES**

PO Box 221, Consett,  
Co. Durham, DH8 1ES

T +44 (0) 8458 726 663

F +44 (0) 8458 726 662

E sales@karsway.co.uk

W www.karsway.co.uk